

ÜRÜN KODU/PRODUCT CODE	: 240X02
ÜRÜN ADI/PRODUCT NAME	: SIVA ALTI COB LED DOWNLIGHT 30W/SURFACE MOUNTED COB LED DOWNLIGHT 30W
ÜRÜN BİLGİSİ/PRODUCT INFORMATION	
GÖVDE/BODY	: ALUMİNYUM ENJEKSİYON/DIE CAST ALUMINIUM
CAM/GLASS	: TEMPERLİ CAM/TEMPERED GLASS
REFLEKTÖR/REFLECTOR	: ALUMİNYUM İYONİZE REFLEKTÖR/ALUMINIUM IONIZE REFLECTOR
IP KORUMA SINIFI/IP PROTECTION	: IP20 Class II
KULLANIM ŞEKLİ/FIELDS OF APPLICATION	: İÇ AYDINLATMA/INDOOR LIGHTING
LED	: COB LED

240X02

Işık Rengi/Light Color

X=3 3000K

4 4000K

6 6500K

## ELEKTRİKSEL ÖZELLİKLER/ELECTRICAL SPECS

TÜKETİM GÜCÜ/POWER	: 30W
GİRİŞ GERİLİMİ/INPUT VOLTAGE	: AC 220V
GİRİŞ AKIMI/INPUT CURRENT	: 0.22 A
FREKANS/FREQUENCY	: 50 Hz
GÜÇ FAKTÖRÜ/POWER FACTOR	: 0.50
ÇIKIŞ GERİLİMİ/OUTPUT VOLTAGE	: 24-42VDC
ÇIKIŞ AKIM/OUTPUT CURRENT	: 0.75 A
THD(TOTAL HARMONIC DISTORTION)	: >%20

## FOTOMETRİK ÖZELLİKLER/PHOTOMETRIC SPECS

RENK SICAKLIĞI/KELVIN TEMPERATURE(CCT)	: 3000K 4000K 6500K
İŞIK AÇISI/LIGHT BEAM ANGLE	: 18°
İŞIK AKISI/LUMEN	: 2820 2860 2860
RENKSEL GERİ VERİM/COLOR RENDERING INDEX (CRI)	: Ra>80
VERİM/EFFICIENCY	: 90Lm/W

## DİĞER ÖZELLİKLER/OTHER SPECS

ÇALIŞMA SICAKLIĞI/OPERATING TEMPERATURE(CCT)	: -10°C, 50°C
LED ÖMRÜ/LED LIFE TIME (PERFORMANCE L70)	: ≥50.000 Saat/Hours


## FOTOMETRİK EĞRİ/LIGHT DISTRIBUTION CURVE

## Işık Dağılım Eğrisi/Light Distribution Curve

## AAI FIGURE

Armatür farklı mesafelerde olduğunda aydınlatılmış alanı ve ortalama aydınlatmayı belirtir.

The curves indicate the illuminated area and the average illumination when the luminaire is at a different distance

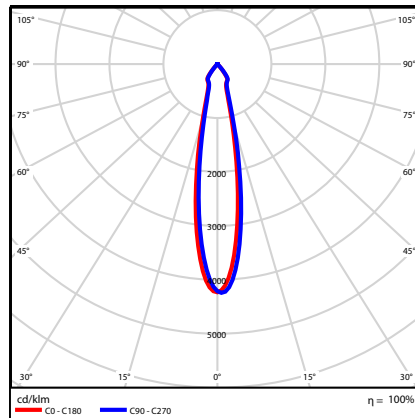

Flux out: 967.7 l m

Height	Avg. Emx	Angle	Diameter
1m	8152, 121341 x	36.37cm	
2m	2038, 30331 x	72.74cm	
3m	905.8, 13481 x	109.11cm	
4m	509.5, 758.31 x	145.48cm	
5m	326.1, 485.31 x	181.85cm	
6m	226.4, 337.01 x	218.21cm	
7m	166.4, 247.61 x	254.58cm	
8m	127.4, 189.61 x	290.95cm	
9m	100.6, 149.81 x	327.32cm	
10m	81.52, 121.31 x	363.69cm	

Height Avg. Emx Angle: 20.61deg Diameter