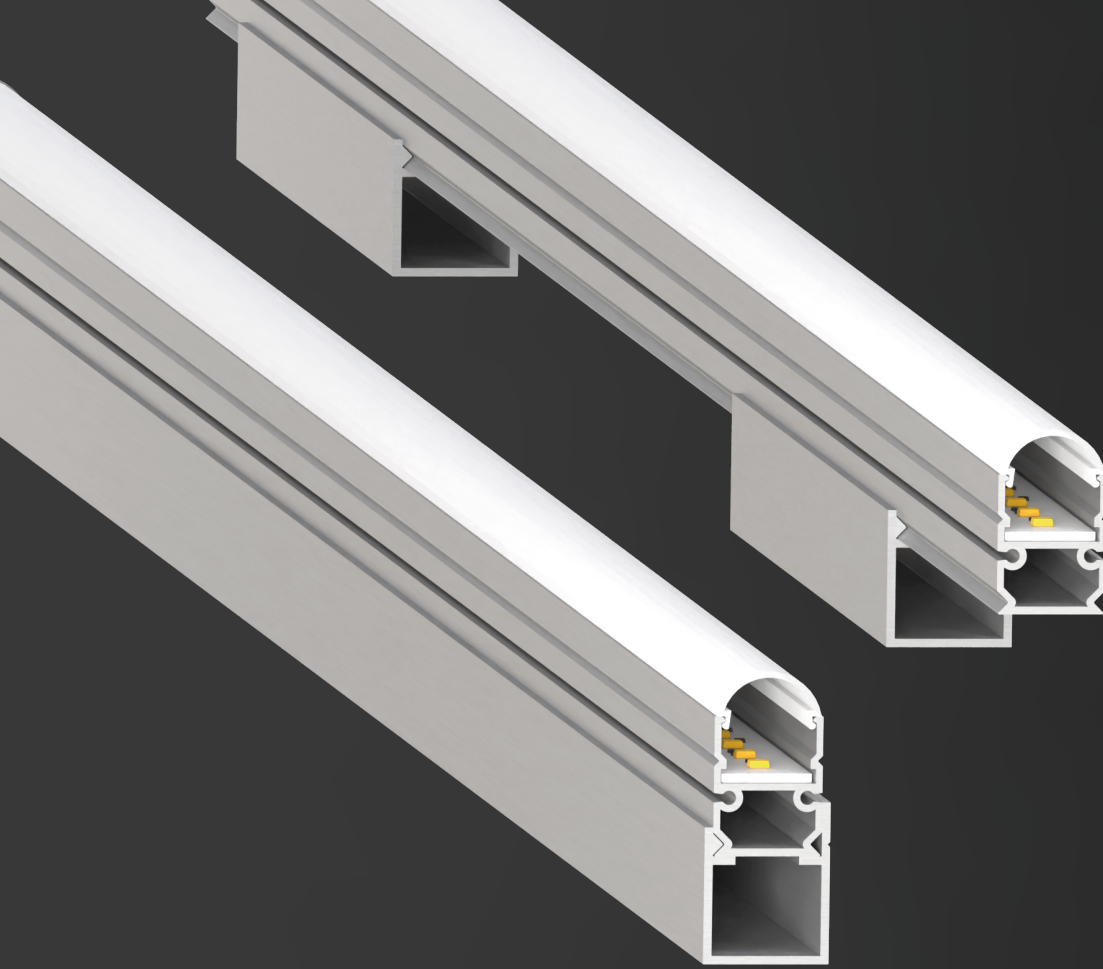




BA17
PC LED Bar
Surface Mounted



HOUSING

Electrostatic powder paint coated extruded aluminum housing
IP40 Protection
Electrical Safety Class III

Body Color Options



OPTIC

PC Diffuser
IEC/EN 62471 Photo-Biologic Protection RG0
UGR (CIE Pub.117):21

Optic Options



LED

SMD LED with a minimum lifetime of 100.000 hours
High color rendering (CRI>80)

Color Rendering Index



CCT



CONTROL

Rated Input Voltage
Range of Input Voltage
Frequency
Power Factor
Operating Temperature
Constant Current LED Driver

220~240VAC
198~264VAC
50~60Hz
PF>0.95
-20°C ~ +50°C
Over Current Protection (OCP), Over Voltage Protectio (OVP),
Short Circuit Protection (SCP), Over Temperature Protection (OTP)

Additional Features



STANDARDS




Luminaire Standarts
Driver Standarts

EN 60598-1 - EN 60598-2-1
-

BA17

PC LED Bar

Surface Mounted

 BA17-AD10 60 LED/m		Power	Lum. Flux	Efficiency	Packaging Sizes	
		14W	641 lm	44 lm/W	Width	- cm
 BA17-BD10 120 LED/m		Power	Lum. Flux	Efficiency	Packaging Sizes	
		14W	707 lm	49 lm/W	Width	- cm
 BA17-CD10 168 LED/m		Power	Lum. Flux	Efficiency	Packaging Sizes	
		14W	721 lm	56 lm/W	Width	- cm
					Length	- cm
					Height	- cm
					Amount per ctn.	- pcs.
					Ctn. weight	- kg
					Deci	-

**The specified luminous flux values may vary by %10.

ORDER CODE EXPENSION

BA17- BD10- 014 - 8		65	S	-9006-PCD8-	2	X	X	S	20			
GROUP CODE	BODY CODE	POWER	CRI	CCT	EFFICIENCY	BODY COLOR	OPTIC	CONTROL	DRIVER	KIT	ACCESSORY	IP
BA17	AD10 BD10 CD10	014: 14W	8: 80	27: 2700K 30: 3000K 40: 4000K 65: 6500K MB: Amber RD: Red GR: Green BL: Blue	S: Standart H: Yüksek	9006: Gri	PCD8: PC %80 2: 24V PCB8: PC %80 Bombeli				S: Standart K: İki Uç Kablolu W: IP65 Soketli	20: IP20