



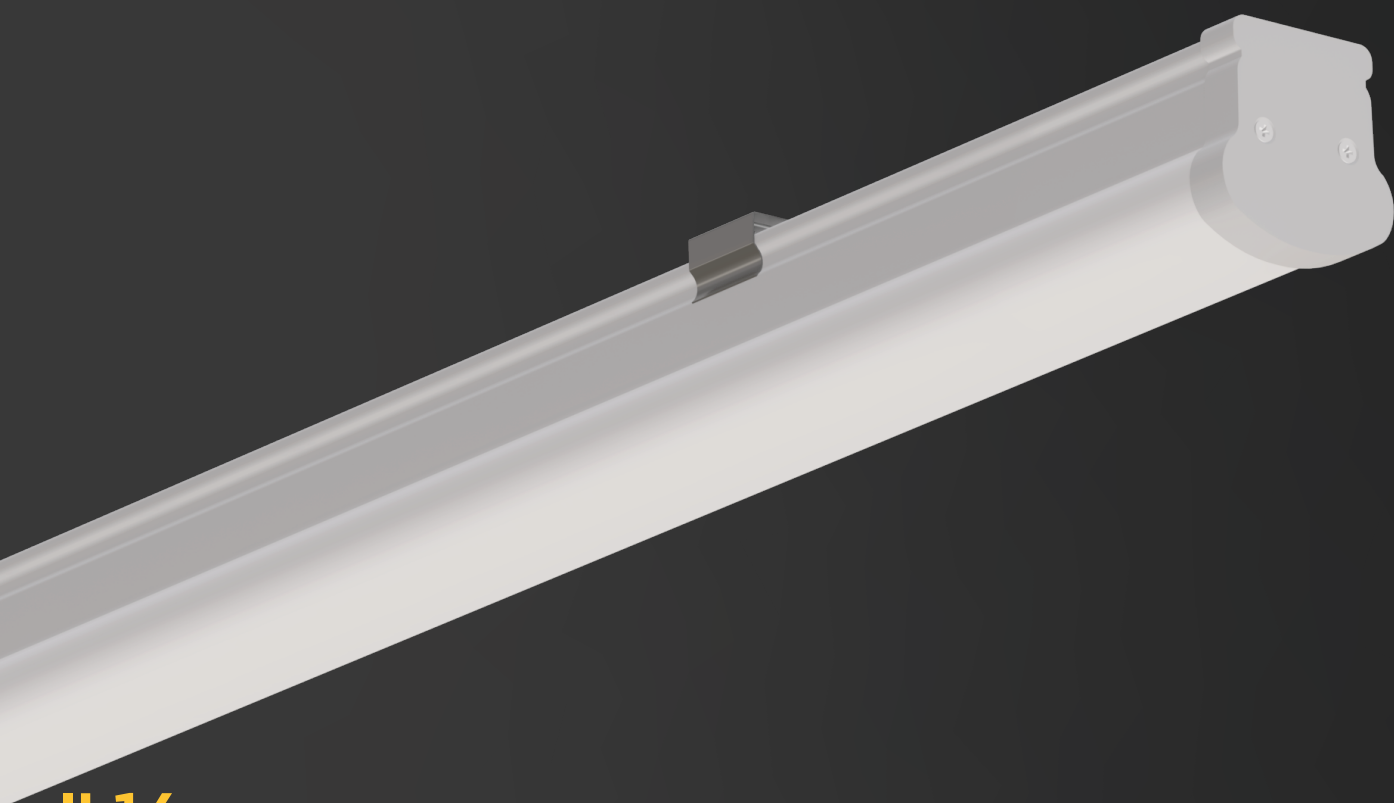

IL14

IP65 Waterproof


PC Monobloc LED Lighting



HOUSING

Polycarbonate extruded monoblock housing
IP65 Protection
Electrical Safety Class I

Body Color Options



OPTIC

PC Diffuser
UGR (CIE Pub.117):21
IEC/EN 62471 Photo-Biologic Protection RG0


Optic Options




LED

SMD LED with a minimum lifetime of 100.000 hours
High color rendering (CRI>80)

Color Rendering Index




CCT



CONTROL

Rated Input Voltage 220~240VAC
Range of Input Voltage 176~264VAC
Frequency 50~60Hz
Power Factor PF>0.95
Operating Temperature -20°C ~ +50°C
Constant Current LED Driver Overload Protection (OLP), Overvoltage Protection (OVP),
Short Circuit Protection (SCP), Over Temperature Protection (OTP)

Additional Features



STANDARDS

Luminaire Standarts EN 60598-1 - EN 60598-2-1
Driver Standarts LVD (EN 61347-1, EN 61347-2-13)
EMC (EN 55015, EN 61547, EN 61000-3-2/3-3)


IL14

IP65 Waterproof

PC Monobloc LED Lighting



IL14-0060




Power	Lum. Flux	Efficiency
15W	1480 lm	92 lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Height	- cm
Amount per ctn.	- pcs.
Ctn. weight	- kg
Deci	-



IL14-0120




Power	Lum. Flux	Efficiency
30W	3173 lm	110 lm/W
40W	3809 lm	103 lm/W
60W	6026 lm	101 lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Height	- cm
Amount per ctn.	- pcs.
Ctn. weight	- kg
Deci	-



IL14-0150



Power	Lum. Flux	Efficiency
60W	5881 lm	107 lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Height	- cm
Amount per ctn.	- pcs.
Ctn. weight	- kg
Deci	-

**The specified luminous flux values may vary by %10.

ORDER CODE EXPENSION

IL14 - 0120 - 040 - 8 40 S - 9016-0120 - O S S S 65

GROUP CODE	BODY CODE	POWER	CRI	CCT	EFFICIENCY	BODY COLOR	OPTIC	CONTROL	DRIVER	KIT	ACSESSORY	IP
IL14	0060 0120 0150	015: 15W 030: 30W 040: 40W 060: 60W	8: 80 9: 90	27: 2700K 30: 3000K 40: 4000K 65: 6500K	S: Standart	9016: White 7016: Anthracite 9005: Black	0120: 120°	O: ON-OFF D: DALI C: Smart Sens. W: Smart TW R: Smart RGB	S: LAMPTIME	S: Standart 3: 3 Hours Kit	S: Standart	65: IP65