



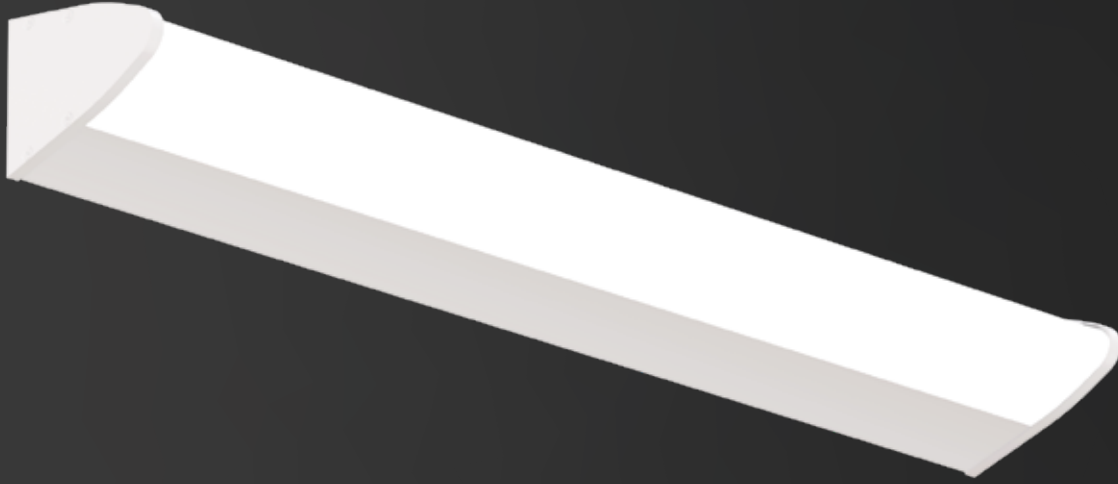

LW10

Linear LED Lighting

Wall



HOUSING
Electrostatic powder paint coated extruded aluminum housing
IP20 Protection
Electrical Safety Class I

Body Color Options



9016 White



9006 Gray



9005 Black



All Colors

OPTIC
PC diffuser with high transmissivity
UGR (CIE Pub.117):21
IEC/EN 62471 Photo-Biologic Protection RG0

Optic Options



120°

LED
SMD LED with a minimum lifetime of 100.000 hours
High color rendering (CRI>80)

Color Rendering Index



80⁺
Ra>80

CCT



2700K



3000K



4000K



5000K



5700K



6500K

CONTROL
Rated Input Voltage 220~240VAC
Range of Input Voltage 176~264VAC
Frequency 50~60Hz
Power Factor PF>0.95
Operating Temperature -20°C ~ +50°C
Constant Current LED Driver Over Current Protection (OCP), Over Voltage Protectio (OVP), Short Circuit Protection (SCP), Over Temperature Protection (OTP)

Additional Features



ON/OFF



DIM



Emergency Lighting

STANDARDS
Luminaire Standarts EN 60598-1 - EN 60598-2-1
Driver Standarts LVD (EN 61347-1, EN 61347-2-13)
EMC (EN 55015, EN 61547, EN 61000-3-2/3-3)

LW10
Linear LED Lighting
Wall



LW10-0060




Power	Lum. Flux	Efficiency
18W	1504 lm	78 lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Height	- cm
Amount per ctn.	- pcs.
Ctn. weight	- kg
Deci	-



LW10-0090




Power	Lum. Flux	Efficiency
27W	2342 lm	77 lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Height	- cm
Amount per ctn.	- pcs.
Ctn. weight	- kg
Deci	-



LW10-0120



Power	Lum. Flux	Efficiency
36W	3114 lm	80 lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Height	- cm
Amount per ctn.	- pcs.
Ctn. weight	- kg
Deci	-

**The specified luminous flux values may vary by %10.

ORDER CODE EXPENSION

LW10- 0120 - 036 - 8				40	S	- 9005-0120 -	O	S	S	S	20	
GROUP CODE	BODY CODE	POWER	CRI	CCT	EFFICIENCY	BODY COLOR	OPTIC	CONTROL	DRIVER	KIT	ACSESSORY	IP
LW10	0060	018: 18W	8: 80	27: 2700K	S: Standart	9016: White	0120: 120°	O: ON-OFF	S: LAMPTIME	S: Standart	S: Standart	20: IP20
	0090	027: 27W		30: 3000K		9006: Gray		D: DALI		3: 3 Hours Kit		
	0120	036: 36W		40: 4000K		9005: Black						
				65: 6500K								