




OW11

IP67 Wallwasher


LED Lighting

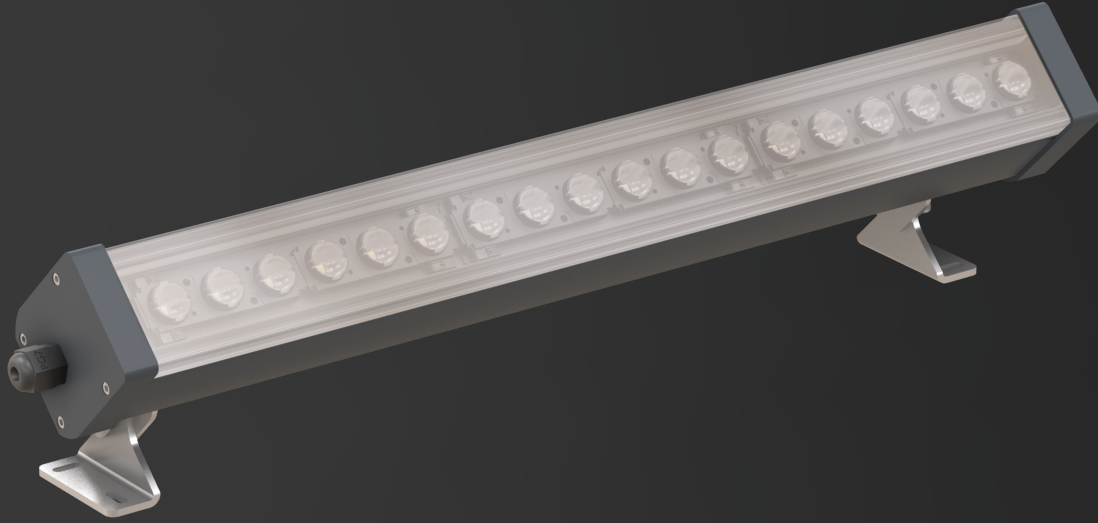

HOUSING

Electrostatic powder paint coated extruded aluminum housing
IP67 Protection
Electrical Safety Class I


Body Color Options



OPTIC

PMMA Lens
UGR (CIE Pub.117):9
IEC/EN 62471 Photo-Biologic Protection RG0

Optic Options



LED

SMD LED with a minimum lifetime of 100.000 hours
High color rendering index (CRI>70)

Color Rendering Index

70⁺
Ra>70

CCT



CONTROL

Rated Input Voltage
Range of Input Voltage
Frequency
Power Factor
Operating Temperature
Constant Current LED Driver

220~240VAC
176~264VAC
50~60Hz
PF>0.95
-20°C ~ +50°C
Over Current Protection (OCP), Over Voltage Protectio (OVP),
Short Circuit Protection (SCP), Over Temperature Protection (OTP)

Additional Features




STANDARDS

Luminaire Standarts
Driver Standarts
EN 60598-1 - EN 60598-2-1
LVD (EN 61347-1, EN 61347-2-13)
EMC (EN 55015, EN 61547, EN 61000-3-2/3-3)

OW11
IP67 Wallwasher
LED Lighting



OW11-0017




Power	Lum. Flux	Efficiency
6W	612 lm	97 lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Height	- cm
Amount per ctn.	- pcs.
Ctn. weight	- kg
Deci	-



OW11-0032




Power	Lum. Flux	Efficiency
12W	1345 lm	112 lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Height	- cm
Amount per ctn.	- pcs.
Ctn. weight	- kg
Deci	-



OW11-0047




Power	Lum. Flux	Efficiency
18W	1904 lm	112 lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Height	- cm
Amount per ctn.	- pcs.
Ctn. weight	- kg
Deci	-



OW11-0062




Power	Lum. Flux	Efficiency
24W	3238 lm	127 lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Height	- cm
Amount per ctn.	- pcs.
Ctn. weight	- kg
Deci	-



OW11-0092




Power	Lum. Flux	Efficiency
36W	4750 lm	123 lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Height	- cm
Amount per ctn.	- pcs.
Ctn. weight	- kg
Deci	-



OW11-0122



Power	Lum. Flux	Efficiency
48W	6428 lm	127 lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Height	- cm
Amount per ctn.	- pcs.
Ctn. weight	- kg
Deci	-

**The specified luminous flux values may vary by %10.


OW11

IP67 Wallwasher RGB

LED Lighting



OW11-R025




Power	Lum. Flux	Efficiency
9W	- lm	- lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Heigth	- cm
Amount per ctn.	- pcs.
Ctn. weigth	- kg
Deci	-



OW11-R047



Power	Lum. Flux	Efficiency
18W	- lm	- lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Heigth	- cm
Amount per ctn.	- pcs.
Ctn. weigth	- kg
Deci	-



OW11-R092



Power	Lum. Flux	Efficiency
36W	- lm	- lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Heigth	- cm
Amount per ctn.	- pcs.
Ctn. weigth	- kg
Deci	-

**The specified luminous flux values may vary by %10.

ORDER CODE EXPENSION

OW11- 0122 - 048 - 8 65 S -7016-0045- O S S S 67

GROUP CODE	BODY CODE	POWER	CRI	CCT	EFFICIENCY	BODY COLOR	OPTIC	CONTROL	DRIVER	KIT	ACSESSORY	IP
OW11	0017: 17 cm 0032: 32 cm 0047: 47 cm 0062: 62 cm 0092: 92 cm 0122: 122 cm R025 R047 R092	006: 6W 009: 9W 012: 12W 018: 18W 024: 24W 036: 36W 048: 48W	8: 80	27: 2700K 30: 3000K 40: 4000K 65: 6500K MB: Amber RD: Red GR: Green BL: Blue	S: Standart	9006: Gray 7016: Anthracite 9005: Black	0015: 15° 0030: 30° OV24: 15°-35° 0045: 45° 0060: 60°	O: ON-OFF R: Smart RGB	S: LAMPTIME	S: Standart	S: Standart	67: IP67