



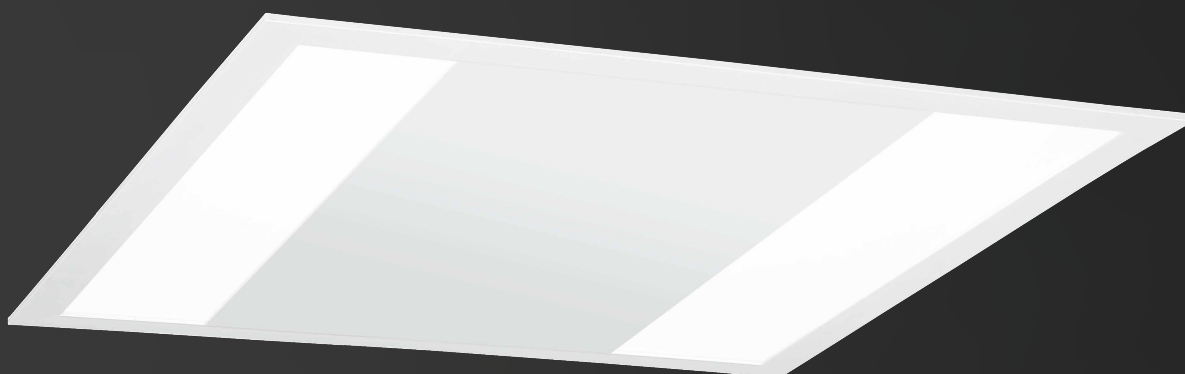

PD12-PD13

Decorative Backlight Panel LED Lighting


Lighting Recessed



HOUSING

Electrostatic powder paint coated metal housing
IP20 Protection
Electrical Safety Class I

Body Color Options



9016
White

OPTIC

PS diffuser with high transmissivity
UGR (CIE Pub.117):21
IEC/EN 62471 Photo-Biologic Protection RG0

Optic Options



POLYSTYRENE

LED


SMD LED with a minimum lifetime of 100.000 hours
High color rendering (CRI>80)

Color Rendering Index



Ra>80

CCT



2700K

3000K

4000K

5000K

5700K


6500K

CONTROL

Rated Input Voltage
Range of Input Voltage
Frequency
Power Factor
Operating Temperature
Constant Current LED Driver

220~240VAC
176~264 VAC
50~60Hz
PF>0.60 (P≤25W) / PF>0.95 (P≥25W)
-20°C ~ +50°C
Over Current Protection (OCP), Over Voltage Protectio (OVP),
Short Circuit Protection (SCP), Over Temperature Protection (OTP)

Additional Features



ON/OFF

DIM

Emergency
Lighting

STANDARDS

Luminaire Standarts
Driver Standarts
EN 60598-1 - EN 60598-2-2
LVD (EN 61347-1, EN 61347-2-13)
EMC (EN 55015, EN 61547, EN 61000-3-2/3-3)

PD12-PD13

Decorative Backlight Panel LED Lighting

Lighting Recessed



PD12-0260
Recessed



Power	Lum. Flux	Efficiency
36W	- lm	- lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Heigth	- cm
Amount per ctn.	- pcs.
Ctn. weighth	- kg
Deci	-



PD13-0260
Clip-In



Power	Lum. Flux	Efficiency
36W	- lm	- lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Heigth	- cm
Amount per ctn.	- pcs.
Ctn. weighth	- kg
Deci	-

**The specified luminous flux values may vary by %10.

ORDER CODE EXPENSION

PD12- 0260 - 036 - 8 40 S - 9016- PS76- 0 S S S 20												
GROUP CODE	BODY CODE	POWER	CRI	CCT	EFFICIENCY	BODY COLOR	OPTIC	CONTROL	DRIVER	KIT	ACSESSORY	IP
PD12 PD13	0260	036: 36W	8: 80	27: 2700K 30: 3000K 40: 4000K 65: 6500K	S: Standart	9016: White	PS76	0: ON-OFF D: DALI	S: LAMPTIME	S: Standart 3: 3 Hours Kit	S: Standart	20: IP20